



# FIXTURES

## Large Size Flood

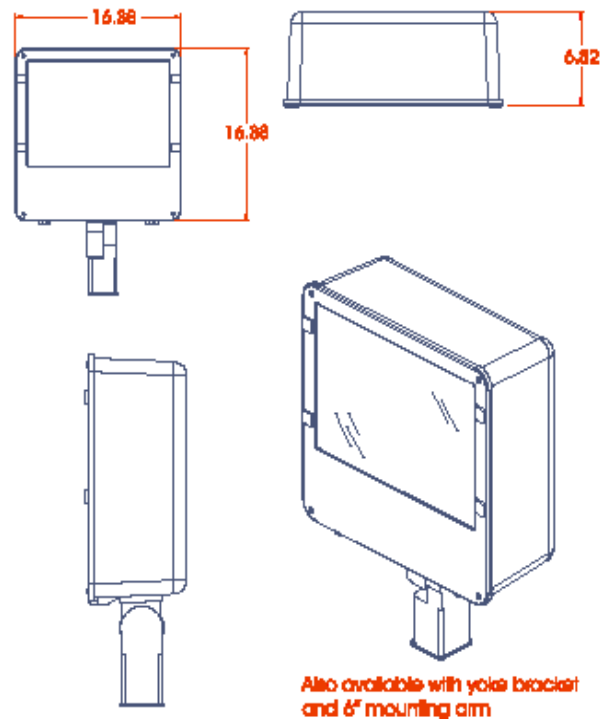

### Features

Die cast aluminum dark bronze housing, hinged door with tempered glasslens. Silicone gasket for moisture and dust proof protection. Anodized aluminum reflector. 1/2" Knockout for securing conduit and installing photocell. Available with swivel mount, yoke mount or 6" shoebox arm for several mounting applications. U.L. Listed for wet and damp locations.

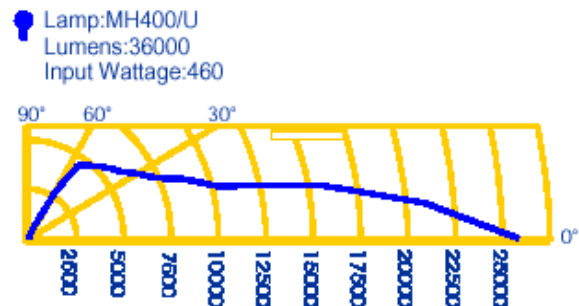

### Applications

Pole lighting, parking lots, perimeter lighting, roof lighting, tennis courts, ballfields, area lighting.

### Electrical

U.L. Listed for wet and damp location

### Reflectors

Available in vertical or forward throw (Forward throw shown in picture)



High Pressure Sodium				
Watts	Bulb/base	Lumens	Catalogue #	NSN
150			NWLT150HPSLFL	
200			NWLT200HPSLFL	
250	ED-28/Mog	26000	NWLT250HPSLFL	6210-01-462-2280
400	ED-28/Mog	50000	NWLT400HPSLFL	6210-01-462-2283
Metal Halide				
250	ED-28/Mog	20500	NWLT250MHLFL	6210-01-462-2286
400	ED-28/Mog	40000	NWLT400MHLFL	6210-01-462-2287